IMPORTANT SAFETY INSTRUCTIONS

When using electrical products, basic precautions should always be followed including the following:

a) READ AND FOLLOW ALL SAFETY INSTRUCTIONS

b) Do not use seasonal products outdoors unless marked suitable for indoor and outdoor use. When products are used in outdoor applications, connect the product to a Ground Fault Circuit Interrupting(GFCI)outlet. If one is not provided, contact a qualified electrician for proper installation.
c) This seasonal use product is not intended for permanent installation or use.
d) Do not mount or place near gas or electric heaters, fireplaces, candles or other similar sources of heat.
e) Do not secure the wiring of the product with staples or nails, or place on sharp hooks or nails.
f) Do not let lamps rest on the supply cord or on any wire.
g) Unplug the product when leaving the house, when retiring for the night, or if left unattended.
h) This is an electric product-not a toy! To avoid risk of fire, burns, personal injury and electric shock it should not be played with or placed where small children can reach it.
i) Do not use this product for other than its intended use.
j) Do not hang ornaments or other objects from cord, wire, or light string.
k) Do not close doors or windows on the product or extension cords as this may damage the wire insulation.
l) Do not cover the product with cloth, paper or any material not part of the product when in use.
m) This product has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Do not use with an extension cord unless plug can be fully inserted. Do not alter or replace the plug. This item may be omitted if the product does not employ a polarized plug.
n) This product is equipped with push-in type lamps. Do not twist lamps.
o) This product employs overload protection(fuse). A blown fuse indicates an overload or short-circuit situation. If the fuse blows, unplug the product from the outlet. Also unplug any additional strings or products that may be attached to the product. Replace the fuse as per the user servicing instructions(follow product marking for proper fuse rating) and check the product. If the replacement fuse blows, a short-circuit may be present and the product should be discarded.
p) Read and follow all instructions that are on the product or provided with the product.

SAVE THESE INSTRUCTIONS

USE AND CARE INSTRUCIONS

a) When the product is placed on a live tree, the tree should be well maintained and fresh. Do not place on live trees in which the needles are brown or break off easily. Keep the tree holder filled with water.
b) If the product is placed on a tree, the tree should be well secured and stable.
c) Before using or reusing, inspect product carefully. Discard any products that have cut, damaged, or frayed wire insulation or cords, cracks in the lampholders or enclosures, loose connections, or exposed copper wire.
d) When storing the product, carefully remove the product from wherever it is placed, including trees, branches, or bushes, to avoid any undue strain or stress on the product conductors, connections, and wires.
e) When not in use, store neatly in a cool, dry location protected from sunlight.



USER SERVICING INSTRUCTIONS

REPLACING FUSES FROM FUSE HOLDER

a) Grasp plug and remove from the receptacle or other outlet device. Do not unplug by pulling on cord.
b) Open fuse cover. Slide open fuse access cover on top of attachment plug towards blades.
c) Remove fuse carefully.
d) Risk of fire. Replace fuse only with 3 Amp, 125 volt fuse (provided with product.)
For motor-Replace fuse only with 5 Amp,125 volt fuse.
e) Close fuse cover. Slide closed the fuse access cover on top of attachment plug.
f) Risk of fire.Do not replace attachment plug. Contains a safety device(fuse) that should not be removed. Discard product if the attachment plug is damaged.

REPLACING BULBS FROM LAMPHOLDERS

a) Grasp plug and remove from the receptacle or other outlet device
Do not unplug by pulling on cord.
b) Pull lamp and plastic base straight out of lampholder.
c) Replace lamp with only 2.5 volt, 0.425 watt super bright type lamp(provided with product).

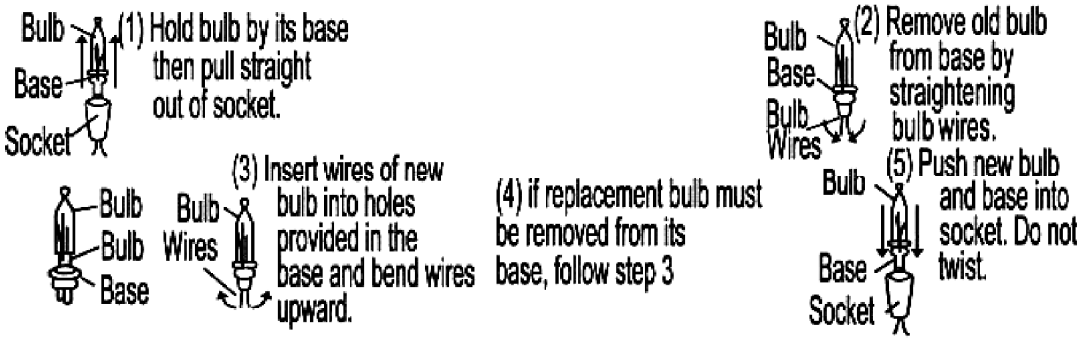
Bulb
Base
Socket
(1) Hold bulb by its base then pull straight out of socket.
Bulb
Bulb
Base
Bulb
Wires
(3) Insert wires of new bulb into holes provided in the base and bend wires upward.
(4) if replacement bulb must be removed from its base, follow step 3
Bulb
Base
Bulb Wires
(2) Remove old bulb from base by straightening bulb wires.
Bulb
Base
Socket
(5) Push new bulb and base into socket. Do not twist.

CAUTION

To reduce the risk of overheating, replace burned-out lamps promptly. Use 2.5 volt, 0.425 watt lamps only.

FOR INDOOR AND OUTDOOR USE
MODEL NO. AG16(34)S-200L-M